


E-60X60-HONDAS-125


Tapa y marco de arqueta hidráulica rellenable.
Dimensiones: 580 x 580 x 72 mm (Rellenable 50 mm de profundidad).



TOP VIEW

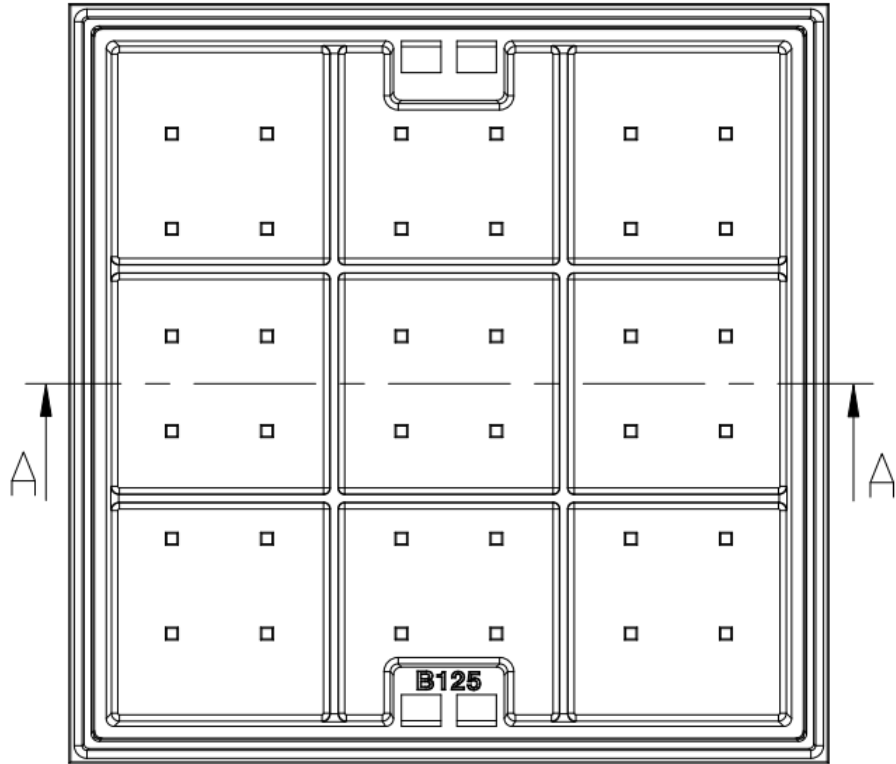

PLAN VIEW

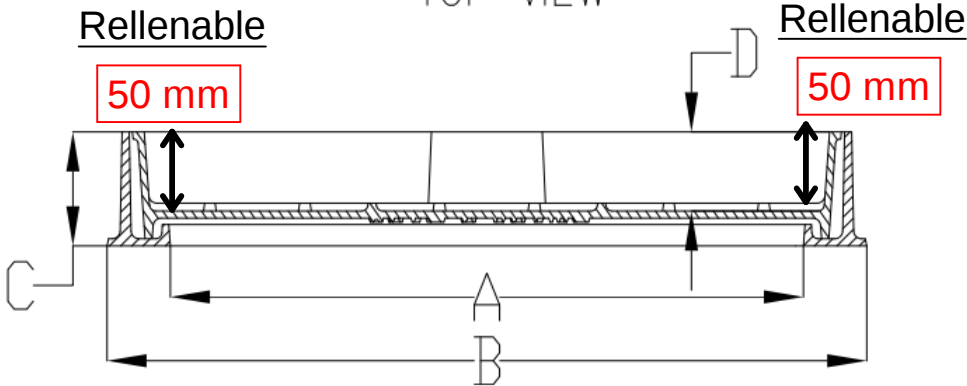

CLEAR OPENING (A)	OVER BASE (B)	TOTAL HEIGHT (C)	RECESS DEPTH (D)
500X500 MM	580X580 MM	72 MM	50 MM

E-60X60-HONDAS-125

Tapa y marco de arqueta hidráulica rellenable.

Dimensiones: 580 x 580 x 72 mm (Rellenable 50 mm de profundidad).



-ES-



Descripción: Tapa y marco de arqueta hidráulica rellenable.

Material: Fundición Dúctil EN-GJS-500-7.

Acabado: Pintado negro asfáltico.

Norma: EN 124-2.

Clase: B-125.

Embalaje: Paletizado y plastificado.

Rellenable: 50 mm de profundidad.

-CA-



Descripció: Tapa i marc d'arqueta hidràulica emplenable.

Material: Foneria Dúctil EN-GJS-500-7.

Acabat: Pintat negre asfàltic.

Norma: EN 124-2.

Classe: B-125.

Embalatge: Paletitzat i plastificat.

Omplible: 50 mm de profunditat.

-EN-



Description: Lid and frame of a refillable hydraulic manhole.

Material: Ductile Iron EN-GJS-500-7.

Paint finish: Painted black asphalt.

Standard: EN 124-2.

Class: B-125.

Packaging: Palletized and laminated.

Fillable: 50 mm deep.

-FR-



Description: Couvercle et cadre d'un regard hydraulique rechargeable.

Matériau: Fonte ductile EN-GJS-500-7.

Finition: Asphalte peint en noir.

Norme: EN 124-2.

Classe: B-125.

Conditionnement: Palettisé et laminé.

Remplissable: 50 mm de profondeur.

-PT-



Descrição: Tapa e armação de boca de visita hidráulica recarregável.

Material: Ferro dúctil EN-GJS-500-7.

Acabamento: Asfalto pintado de preto.

Norma: EN 124-2.

Classe: B-125.

Embalagem: Paletizado e laminado.

Preenchimento: 50 mm de profundidade.